

## 🔊 BLUE TOOTH

### PERFORMANCE

- o Long Cycle Life>2000cycles @100% DOD.
- o High Density, High Discharge Current, High Temperature Range.
- Light Weight, Maintenance Free.
- Fast Charging.
- Environment Friendly.

### **BATTERY DATA SHEET**

| Electrical Parameters              |                          |
|------------------------------------|--------------------------|
| Nominal Voltage                    | 38.4V                    |
| Rated Capacity                     | 100Ah                    |
| Energy                             | 3840Wh                   |
| Resistance                         | <b>≤30m</b> Ω            |
| Efficiency                         | 99%                      |
| Cycle Life                         | >2000cycles @1C,100% DOD |
| SelfDischarge                      | 2% per Month             |
| Max. Battery connected in Series   | 4PCS                     |
| Max. Battery connected in Parallel | 20PCS                    |

| Discharge Parameters          |                 |
|-------------------------------|-----------------|
| Continuous Discharge Current  | 150A            |
| Peak Discharge Current        | 450A(5 seconds) |
| Recommended Volt. Disconnect  | 30V             |
| BMS Discharge Cut-off Voltage | 24V             |
| Reconnect Voltage             | 27.6V           |
| Short Circuit Protection      | 200~600 us      |

| Compliance Certificate  |                         |
|-------------------------|-------------------------|
| Certifications          | UL1642(CELL)            |
|                         | CE                      |
|                         | IEC62133 & CB           |
|                         | КС                      |
|                         | BIS                     |
| Shipping Classification | UN3480, Class 9, UN38.3 |

HEAD OFFICE Unit 30 76 Hume Highway LANSVALE NSW 2166 Tel: +(02) 9755 7851 Fax: +(02) 9755 7852 Email: batteries@superstart.com.au

# V-LFP-36-100EV

### LITHIUM IRON PHOSPHATE BATTERY


### **FEATURES**


- o Lithium Iron Phosphate (LiFePO4).
- o Integrated Battery Management System(BMS).
- o BMS with Intelligent Cell Balancing.
- Sealed ABS Plastic Housing.
- o Bluetooth


| Mechanical Parameters |                       |
|-----------------------|-----------------------|
| Dimension(L x W x H)  | 522 x 240x 218mm      |
|                       | 20.55 x 9.45 x 8.58"  |
| Weight                | 36.1kg(79.59bs)       |
| Terminal Type         | M8 (Torque: 10-12N.m) |
| Battery Housing       | ABS, UL-94 V-0        |
| Housing Protection    | IP65                  |
| Cell Type-Chemistry   | LiFePO4 Cell          |
| SOC Display(Optional) | None                  |


| Charge Parameters          |            |
|----------------------------|------------|
| Charge Method              | CC-CV      |
| Charge Voltage             | 43.2~44.4V |
| Recommended Float Voltage  | 41.4V      |
| Recommended Charge Current | 20A        |
| Maximum Charge Current     | 100A       |
| Minimum Charge Current     | 10A        |
| BMS Charge Cut-off Voltage | 46.8V      |

| Temperature Parameters       |                           |
|------------------------------|---------------------------|
| Discharge Temperature        | -20 to 60°C (-4 to 140°F) |
| Charge Temperature           | 0 to 45°C (32 to 113°F)   |
| Storage Temperature          | -20 to 60°C(-4 to 140°F)  |
| BMS Low Temperature Cut-off  | -10°C(14°F)               |
| BMS Low Temperature Turn-On  | 0°C (32 °F)               |
| BMS High Temperature Cut-off | 65°C(149°F)               |
| BMS High Temperature Turn-On | 45°C(113°F)               |







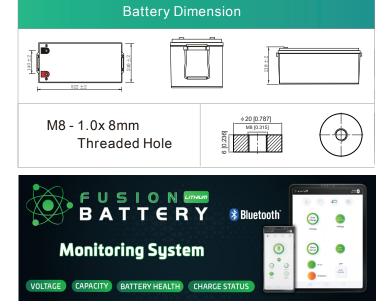

View live data with the intelligent Fusion Lithium Bluetooth 4.0 BLE technology.


Find the identification code on top of Fusion Lithium battery. Open the Fusion Lithium App and click relevant code to connect.



Available on Google Play

App Store


- Access your BMS independently with multiple batteries
- Monitor the status of your lithium battery: State Of Charge (SOC), Temperature, charging or discharging current, etc
- Track the Cycle Life of your Lithium Battery
  Assess what protections have been triggered






Do Not Mix With Sealed Lead Acid Batteries When Recycling. See FUSION User's Manual for Proper Operation. Fusion Lithium BATTERIES. All Rights Reserved.

#### DISCHARGE CAPACITY at VARIOUS TEMPERATURES DISCHARGE @1C, 25°C



CHARGING CHARACTERISTICS @0.5C, 25°C



**Battery Applications** 

- + Electric Motors
- + Electric Trolling Motors
- + RV (Camping / Automotive)
- + Data Center UPS
- + Telecom Backup Power
- + Military Power Supply
- + Solar Energy Storage System
- + Solar Street LED Lightings
- + Industrial Robotics & Handling Equipment
- + Floor Cleaning Machines
- + Electric Bike & Motorcycles
- + Electric Mobilities( E-scooters / Wheelchair)
- + Golf Trolley & Golf Carts
- + Medical Devices
- + Electric Boats



. 36V



ISO 9001

TRADING SINCE 1995