



Fuse Block

Features

New Fuse Block from Baintech Power Products.

- Available in 6 or 12 fuse outlets
- 100 amps maximum per fuse block
- 30 amps maximum per individual fuse
- Provision for holding 2 spare fuses
- Common negative and common positive
- Accepts ATO and ATC fast acting standard or mini blade fuses
- Clear cover made from polycarbonate
- Cover satisfies ABYC/USCG requirements for insulation
- Base made from reinforced polycarbonate

Technical Specifications - BTFB6

6 Blade Fuse Block

Max Amps per Circuit:	30 Amperes
Max Amps per Block:	100 Amperes
Max Voltage:	32V DC
Recommended Wire Size:	Positive & Negative Feed 14-25mm Individual Circuits 4-9mm
Recommended Torque:	#8 Screw 18 in-lb #10 Stud 24 in-lb
Max Ambient Temperature:	0-50°C
Block Dimensions:	124.31 x 84.20 x 38.55 mm

Technical Specifications - BTFB12

12 Blade Fuse Block

Max Amps per Circuit:	30 Amperes
Max Amps per Block:	100 Amperes
Max Voltage:	32V DC
Recommended Wire Size:	Positive & Negative Feed 14-25mm Individual Circuits 4-9mm
Recommended Torque:	#8 Screw 18 in-lb #10 Stud 24 in-lb
Max Ambient Temperature:	0-50°C
Block Dimensions:	164.39 x 84.20 x 38.57 mm


BT FB6



BT FB12



Wiring Diagram

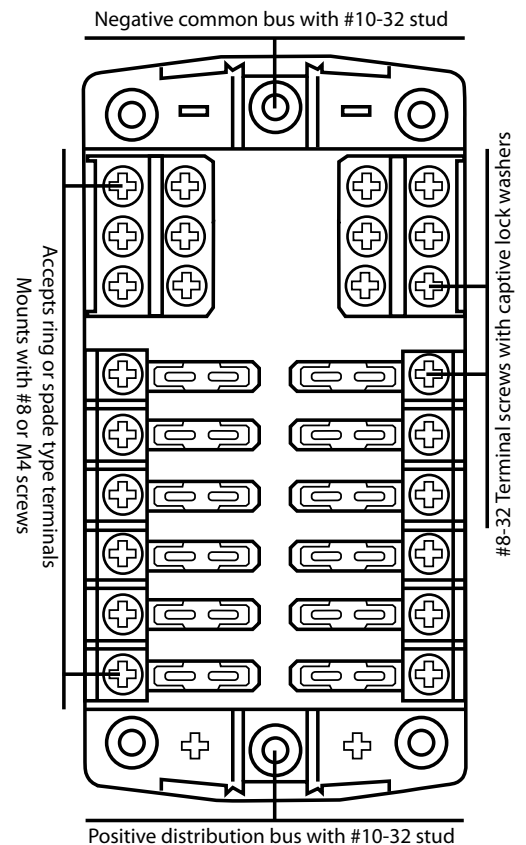

www.baintech.com.au

Phone: 1300

BAINTECH
224683

PO Box 1617
Cleveland QLD 4163
info@baintech.com.au