

DELTEC[®]

BATTERIES

DEL-875



Applications

- Golf Carts
- Utility Vehicles
- Recreational Vehicles

Certificates






DELTEC BATTERY
COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV
= ISO 9001:2015 =

Specification


Nominal Voltage	8 V
Nominal Capacity	165 Ah
Battery Type	Lead Acid Flooded
Terminal	Embedded low profile terminal
Approx Weight	Approx 28.1kg (62lbs)
Container Material	Polypropylene
Rated Capacity	183 Ah 100 Hour Rate 165 Ah 20 Hour Rate 150 Ah 10 Hour Rate 141 Ah 5 Hour Rate
Reserve Capacity	Reserve @ 56 AMPS 112 Minutes
Operating Temperature	Discharge -20 ~ 45°C Charge -20 ~ 45°C (-4 ~ 122°F) Storage Recommended as close to 25°C as possible
Charge Method (25°C)	Bulk Charge 9.88V Float Charge 9.00V Equalization Charge 10.80 Max Charge Current 0.5C
Self Discharge	5 - 15% per month depending on storage temperature conditions

Dimension: 261 (L) x 180 (W) x 272 (H) Unit: mm

Terminal

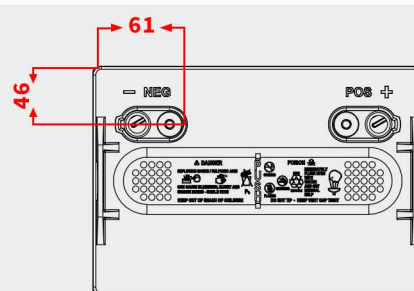


Performance

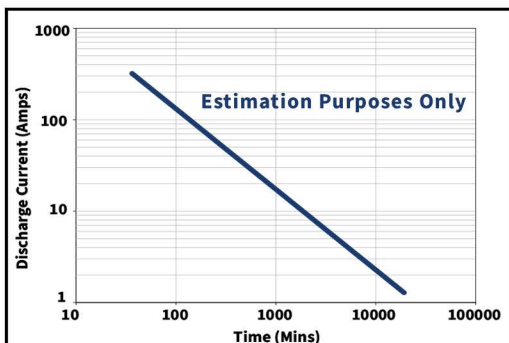

Percent
Capacity

VS

Temperature

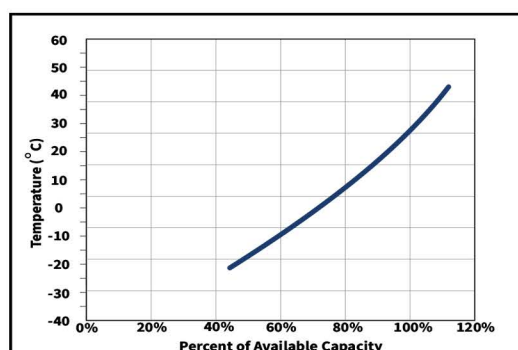

For warranty terms & conditions, visit www.deltecbatteries.com.au

PERFORMANCE WHEN IT COUNTS



1300 335 228