

DELTEC[®]

BATTERIES

DEL-L16G



Applications

- Aerial Work Platforms
- Floor Cleaning Machines
- Lighting Boards
- Material Handling
- Solar

Certificates






DELTEC BATTERY
COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV
= ISO 9001:2015 =

Specification


Nominal Voltage	6 V
Nominal Capacity	370 ah
Battery Type	Deep-Cycle Flooded / Wet Lead-Acid Battery
Terminal	Embedded low profile terminal
Approx Weight	Approx 44.5kg (98 lbs)
Container Material	Polypropylene
Rated Capacity	411 Ah 100 Hour Rate 370 Ah 20 Hour Rate 340 Ah 10 Hour Rate 303 Ah 5 Hour Rate
Reserve Capacity	Reserve @ 75 AMPS 185 Minutes
Operating Temperature	Discharge -20 ~ 45°C Charge -20 ~ 45°C (-4 ~ 122°F) Storage Recommended as close to 25°C as possible
Charge Method (25°C)	Bulk Charge 7.41V Float Charge 6.75V Equalization Charge 8.10 Max Charge Current 0.5C
Self Discharge	5 - 15% per month depending on storage temperature conditions

Dimension: 313 (L) x 174 (W) x 417 (H) Unit: mm

Terminal

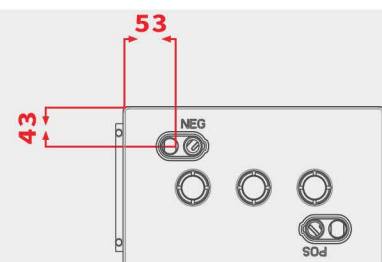


Performance

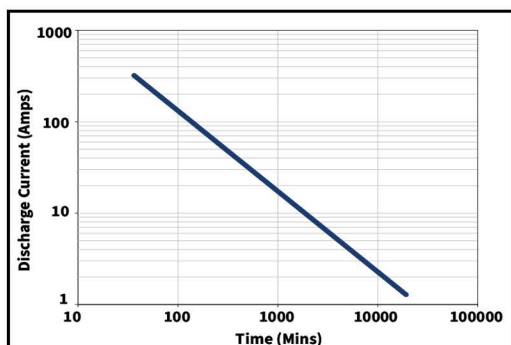

Percent
Capacity

VS

Temperature

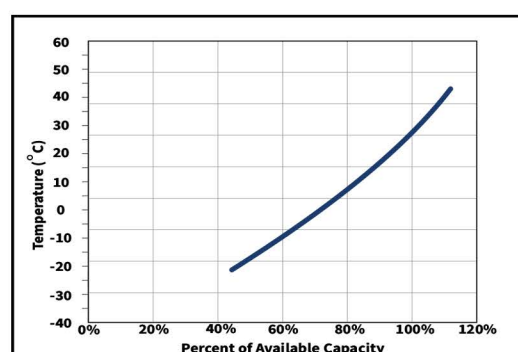

For warranty terms & conditions, visit www.deltecbatteries.com.au

PERFORMANCE WHEN IT COUNTS



1300 335 228