

DELTEC[®]

BATTERIES

DEL-LCDINGC2



Applications

- Mobile Elevating Work Platforms
- Material Handling
- Floor Machines
- Lighting Boards
- Electric Vehicles

Certificates

RoHS **REACH** **FC** **CE** **PS E** **✓**



Specification

Nominal Voltage	6 V
Nominal Capacity	230 Ah
Battery Type	AGM Lead Carbon
Terminal	M8
Approx Weight	Approx 31.7kg (69.9lbs)
Container Material	ABS

Rated Capacity	230 Ah 20 Hour Rate (11.5A to 5.25V) 179.4 Ah 3 Hour Rate (59.8A to 5.10V) 139 Ah 1 Hour Rate (139A to 4.80V)
-----------------------	---

Reserve Capacity	Reserve @ 25 AMPS 475 Minutes Reserve @ 56 AMPS 190 Minutes Reserve @ 75 AMPS 140 Minutes
-------------------------	---




Operating Temperature	Discharge -40 ~ 60°C (-40~ 140°F) Charge -20 ~ 50°C (-4~ 122°F) Storage -20 ~ 50°C (-4~ 122°F)
------------------------------	--

Charge Method (25°C)	Float Use 6.85 - 6.95V @ 25 °C Cycle Charge 7.15 - 7.25V @ 25 °C Max Charge Current 57.5A
-----------------------------	---


Self Discharge	3% of capacity declined per month at 25°C
-----------------------	---

Dimension: 243 (L) x 188 (W) x 245 (H) x 275 (TH) Unit: mm


Terminal

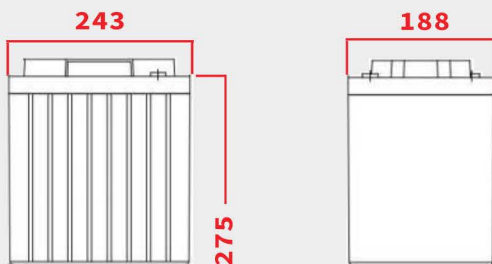

DOD

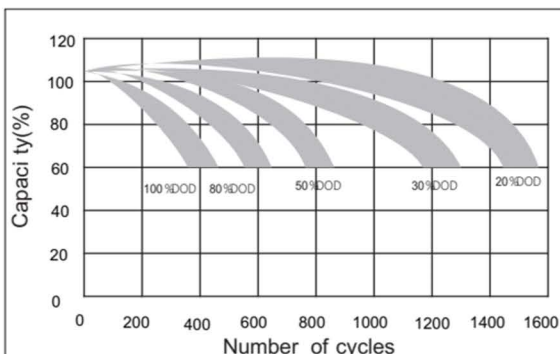

CHARGING CHARACTERISTIC

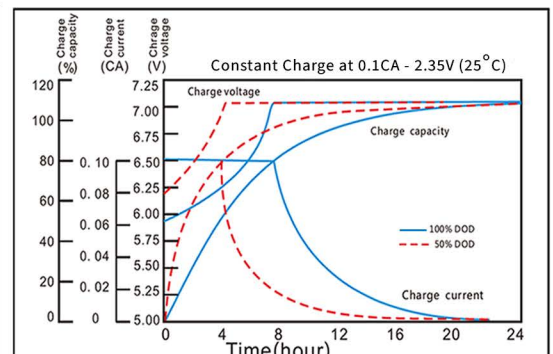

For warranty terms & conditions, visit www.deltecbatteries.com.au

PERFORMANCE WHEN IT COUNTS

1300 335 228