

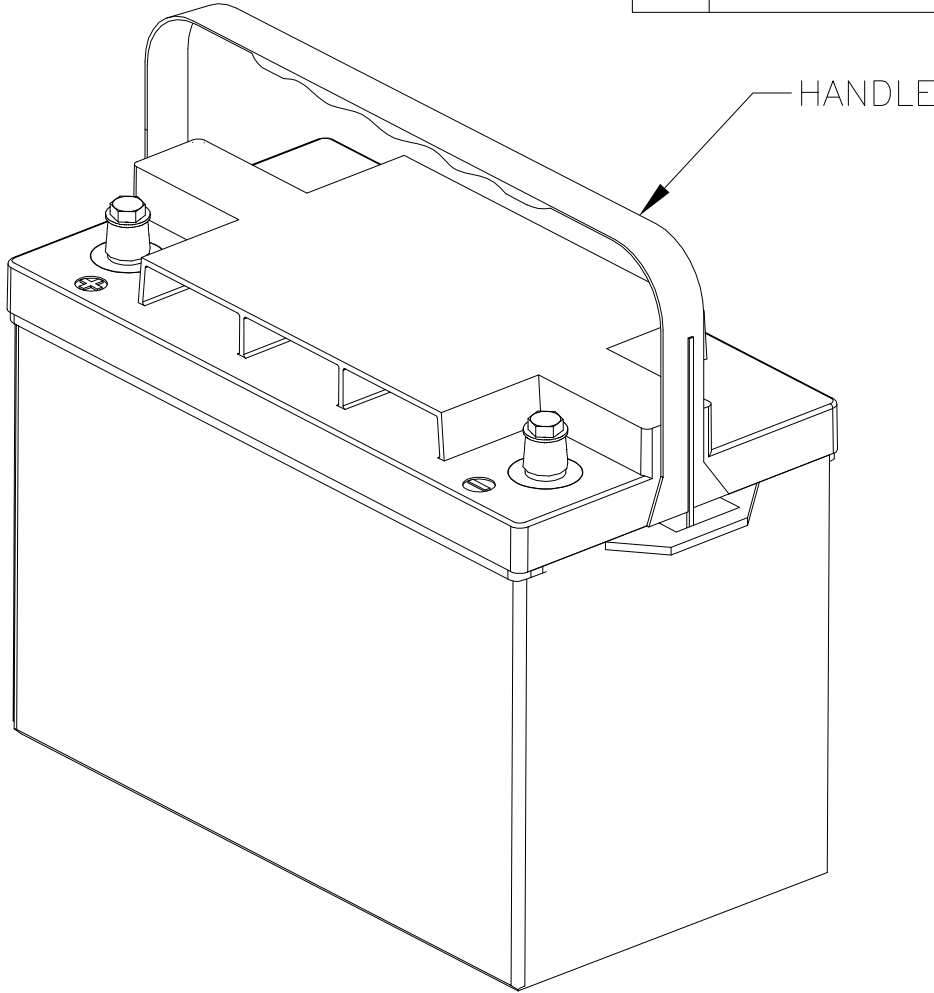
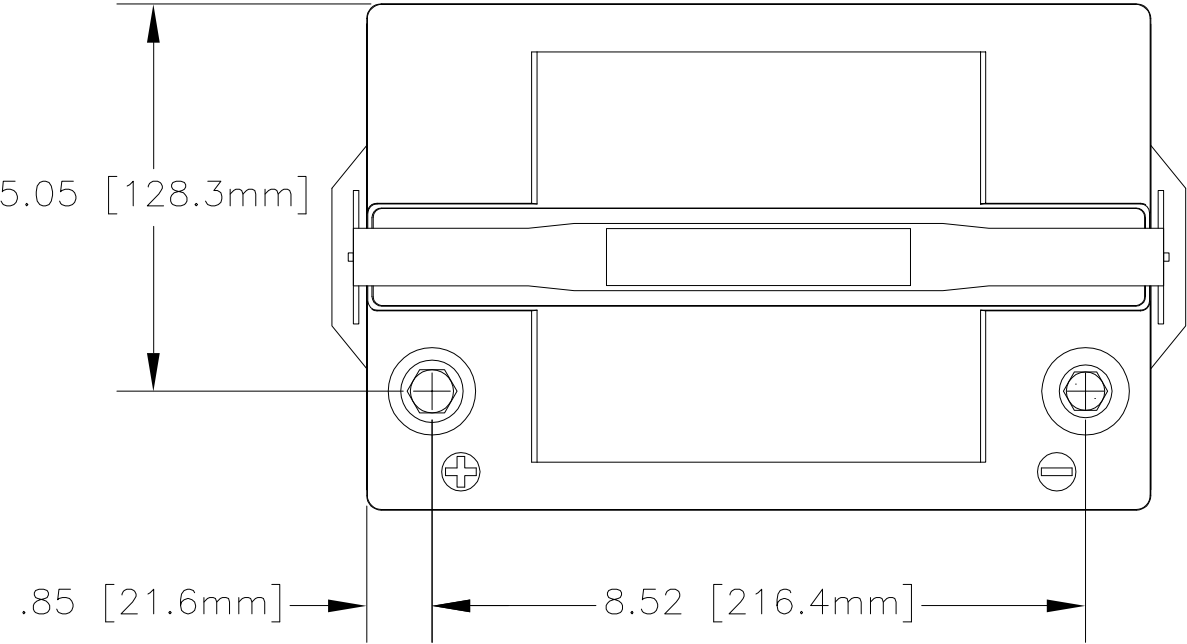


- NOTES: UNLESS OTHERWISE SPECIFIED
1. SEE DRAWING NO. CB-00288 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
 2. ALL TESTING ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
 3. ALL DIMENSIONS ARE IN INCHES [MM].

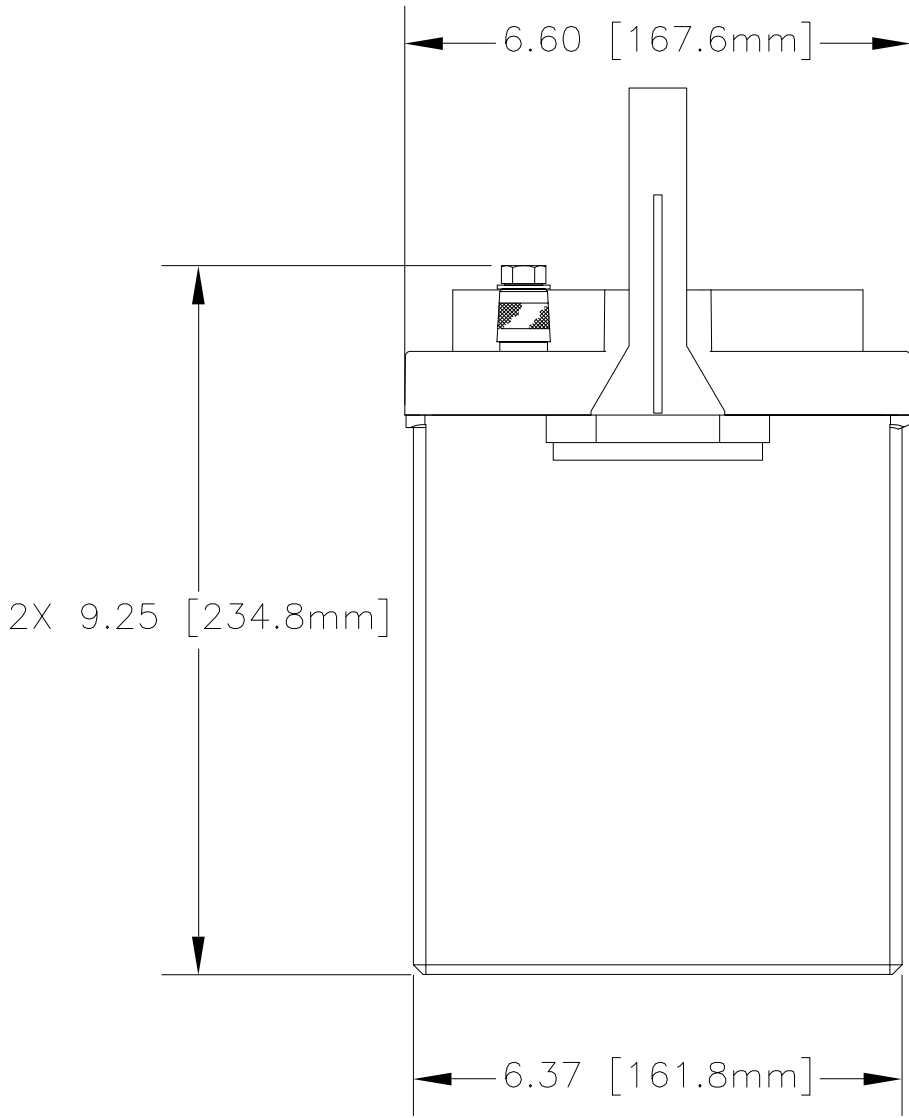

REFERENCE VIEW

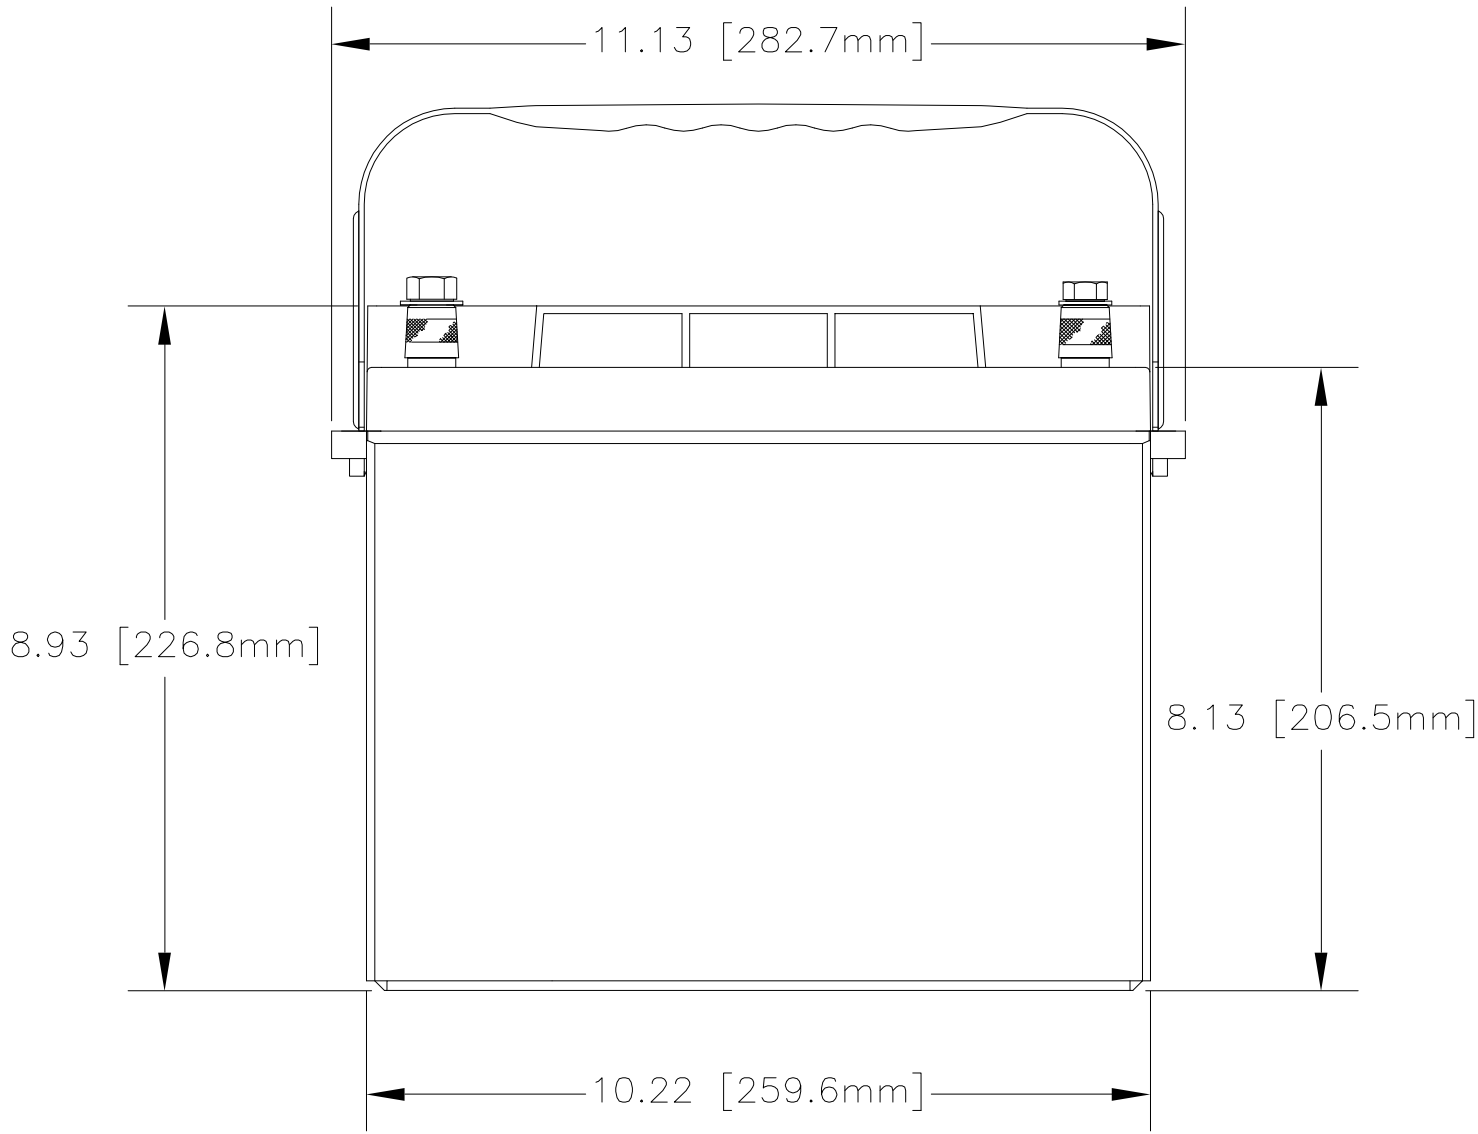

ENVELOPE DRAWING

CAPACITY RATE	
PART NUMBER	GPL-24T
NOMINAL WEIGHT	56 LBS [25.5 KG]
AMPERE HOUR CAPACITY @ 20 HOUR 1.75 VOLTS/CELL @ 77°F (25°C)	80 AH
MINUTES OF DISCHARGE @ 25 AMPS 1.75 VOLTS/CELL @ 77°F (25°C)	149 MIN

		CAGE CODE	PART OR IDENTIFYING NO.		NOMENCLATURE OR DESCRIPTION				MATERIAL SPECIFICATION		ITEM NO.		
QTY REQD		PARTS LIST											
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± 1/32 .XX ± .06 ± 1° .XXX ± .060					CONTRACT NO.			CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790					
					APPROVALS		DATE		TITLE				
					DRAWN ELH		3/13/00		BATTERY, 12 VOLT, GPL-24T				
					CHECKED S. VALDEZ		3/13/00		SIZE		CAGE CODE		DWG NO.
TREATMENT NONE						C		63017		GPL-24T		A	
FINISH NONE			APPROVED JBT			3/16/00							
SIMILAR TO NA		ACT WT NA	CALC WT NA	ISSUED AT		5/23/02		SCALE NONE		SHEET 1 OF 1			